Mote Hardware Session

Overview:

- Platforms & Interfaces
- Sensor Boards and Design
- Programming Boards
- Gateways

Family of Motes

Mote Type	WeC	Renee	Mica	Mica2	Mica2Dot
Microcontroller					
Type	AT90LS8535	Atmega163	Atmega128	Atmega128	Atmega128
CPU Clock (Mhz)	4	4	4	7.3827	4
Program Memory (KB)	8	16	128	128	128
Ram (KB)	0.5	1	4	4	4
UARTs	1	1	2 (only 1 used)	2	2
SPI	1	1	1	1	1
I2C	Software	Software	Software	Hardware	Hardware
Nonvolatile storage					
Chip	24LC256		AT45DB041B		
Size (KB)	32		512		
Radio Communication					
Radio	RFM TR1000			Chipcon CC1000	
Frequency	916 (single freq)			916/433 (multiple channels)	
Radio speed (kbps)	OOK		ASK	FSK	
Transmit Power Control	Programmable resistor potentiometer			Programmable via CC1000 registers	
Encoding	SecDed (software)			Manchester (hardware)	

Mica / Mica2 Mote Comparison

	Mica	Mica2	Mica2 Dot
Processor	4MHz	7.7MHz	4MHz
Atmega128	103 Mode	128 Mode	128 Mode
	1 Serial Port	2 Serial Ports	1 Serial Port
	Over Air Pgmbl	Over Air Pgmbl	Over Air Pgmbl
Radio	Single Freq AM	Tunable FM	Tunable FM
Frequency (MHz)	433 or 916	300-320	300-320
Data Rate	52 Kb Raw	38 Kb Encoded	38 Kb Encoded
Range (Max)	300' to 100'	1000' or 500'	1000' or 500'
On-Board Flash	512 Kbytes	512 Kbytes	512 Kbytes
Unique ID	No	Yes	Yes

Common Platform Architecture

- Atmega uP
  - 32Khz crystal and 4Mhz (7.3728Mhz Mica2) crystal.
  - 10 bit ADC
  - UART (Mica2/Mica2Dot have 2)
  - SPI bus
  - I2C bus (hardware for mica2/mica2dot)
- Radio (RFM or Chipcon 1000)
- External serial flash memory (512K byte)
- Connectors for interfacing to sensor and programming boards
- 3 programmable leds (1 for Mica2Dot)
- JTAG port (Mica, Mica2, Mica2Dot)

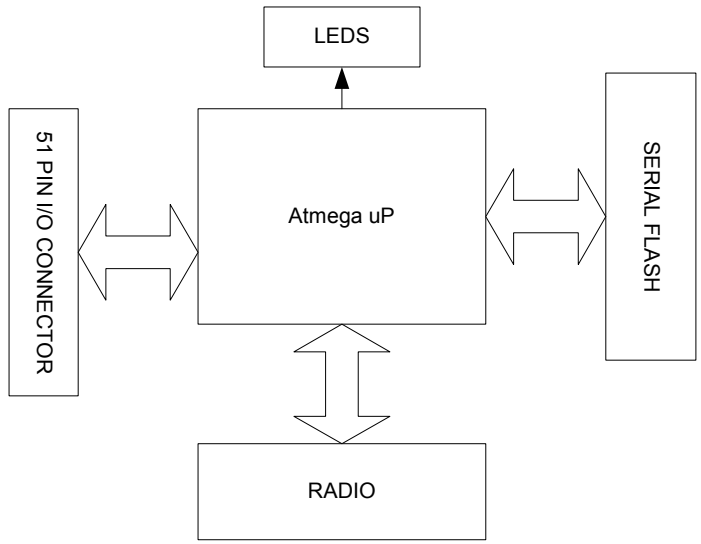

Mote-Kit 5242 Professional Kit

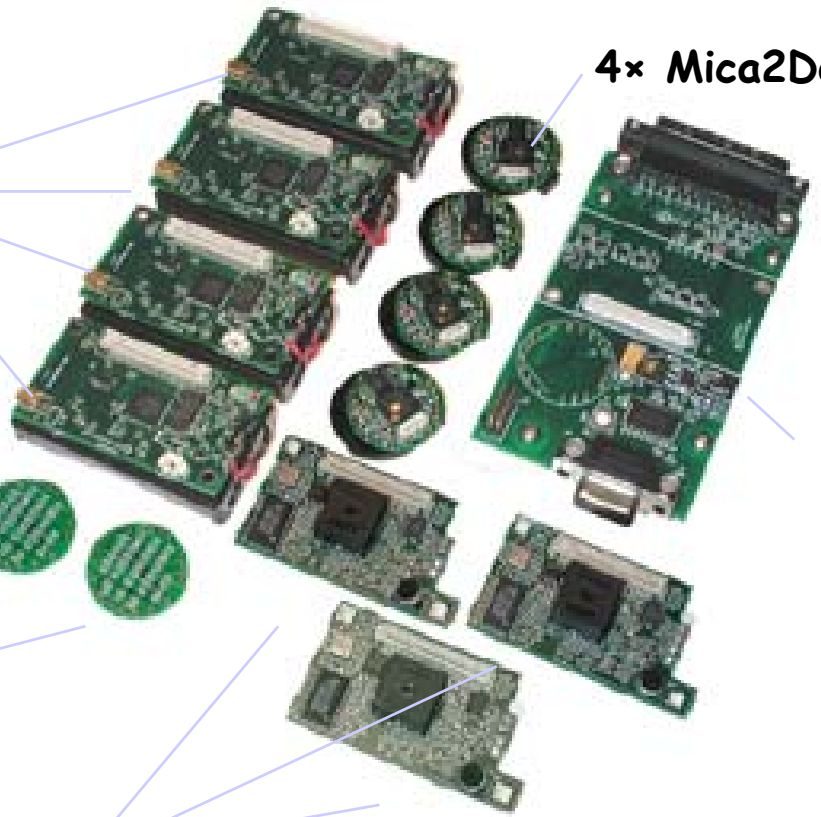

4× Mica2 Motes

4× Mica2Dot Motes

Mote to PC Interface Board (MIB500)

2× Prototyping Boards (MDA500)

3× Sensor Boards (MTS300)

The CC1000 Radio Interface

- Dedicated cpu bus (lines) to configure radio registers for radio frequency, power,…..
- Dedicated SPI bus for data transfer. CC1000 is bus master.
- Radio generates one interrupt every 8 bits when in receive mode.
- Runs usually at 38K or 19K bit rate (default) Manchester (2x bit)
- More in-depth radio discussion later in session.

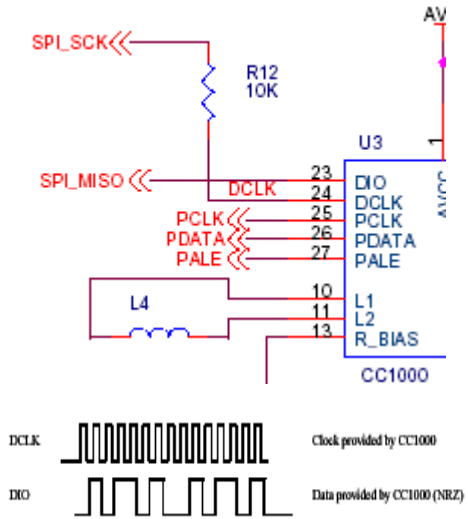

Baud Rate	Xmt or Rcv Time(*)
19K	~40msec
38K	~20msec

(*) Does not include random delay

The Flash Memory Interface

- 512 K bytes of flash (non-volatile) storage
- Useful for data logging.
- Used by GSK (Generic Sensor Kit) and TinyDB for data logging.
- Used by XNP for code download.
- Serial interface to Atmega uP
- TinyOS driver (Logger..) bit bangs interface
- Attached to 2nd uart port on Mica2. Another driver (UCB) uses synchonous usart for high speed data transfer.(5KB/Sec driver)
- Beware, device consumes 15 ma when storing to memory

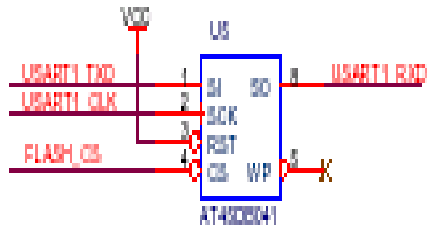

The ADC Interface

- Eight channels of 10 bit ADC, multiplexed.
- Dedicated channels (Mica2):
  - ADC0 : Radio's RSSI
- Shared Mica2 Channels
  - ADC7 : Battery monitor (can be shared with another channel but will have ~10K ohm impedance.
  - ADC4..ADC7: JTAG. If using JTAG debug these channels won't work as ADC inputs.
- Shared Mica2Dot Channels
  - ADC1: Shared for both thermistor and battery voltage
  - ADC4..ADC7: JTAG. If using JTAG debug these channels won't work as ADC inputs

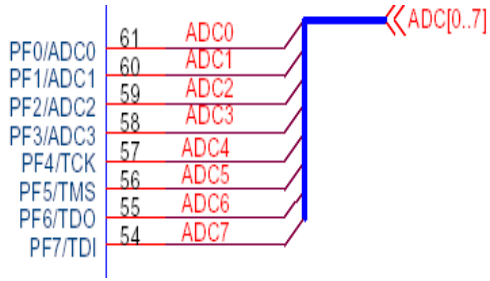

Mica2 Sensor Interface

Pin	Name	Description	Pin	Name	Description
1	GND	Ground	27	UART_RXDO	Uart0 Rcv
2	VSNR	Voltage(battery)	28	UART_TXDO	Uart0 Tx
3	INT3	GPIO	29	PWO	GPIO/PWM
4	INT2	GPIO	30	PW1	GPIO/PWM
5	INT1	GPIO	31	PW2	GPIO/PWM
6	INT0	GPIO	32	PW3	GPIO/PWM
7	BAT_MON	Battery Monitor Voltage	33	PW4	GPIO/PWM
8	LED3	Green Led	34	PW5	GPIO/PWM
9	LED2	Yellow Led	35	PW6	GPIO/PWM
10	LED1	Red Led	36	ADC7	GPIO/ADC CH7, JTAG
11	RD	GPIO	37	ADC6	GPIO/ADC CH6, JTAG
12	WR	GPIO	38	ADC5	GPIO/ADC CH5, JTAG
13	ALE	GPIO	39	ADC4	GPIO/ADC CH, JTAG
14	PW7	GPIO	40	ADC3	GPIO/ADC CH3
15	USART1_CLK	Usart clock	41	ADC2	GPIO/ADC CH2
16	PROG_MOSI	Programmer Pin	42	ADC1	GPIO/ADC CH1
17	PROG_MISO	Programmer Pin	43	ADC0	GPIO/ADC CH0
18	SPI_CLK	Radio Clock	44	THERM_PWR	GPIO
19	USART1_RXD	Usart1 receive	45	THRU1	Thru user connect
20	USART1_TXD	Usart1 xmit	46	THRU2	Thru user connect
21	I2C_CLK	I2C bus clock	47	THRU3	Thru user connect
22	I2C_DATA	I2C bus data	48	RSTN	uP reset
23	PWMO	GPIO	49	PWM1B	GPIO
24	PWM1A	GPIO	50	VCC	Voltage (battery)
25	AC+	GPIO	51	GND	ground
26	AC-	GPIO			

Blue: OK to use
Yellow: OK to use but has shared functionality
Red: Do no use
See Atmega128 specification for more information regarding signal functionality.

Mica2 Sensor Interface

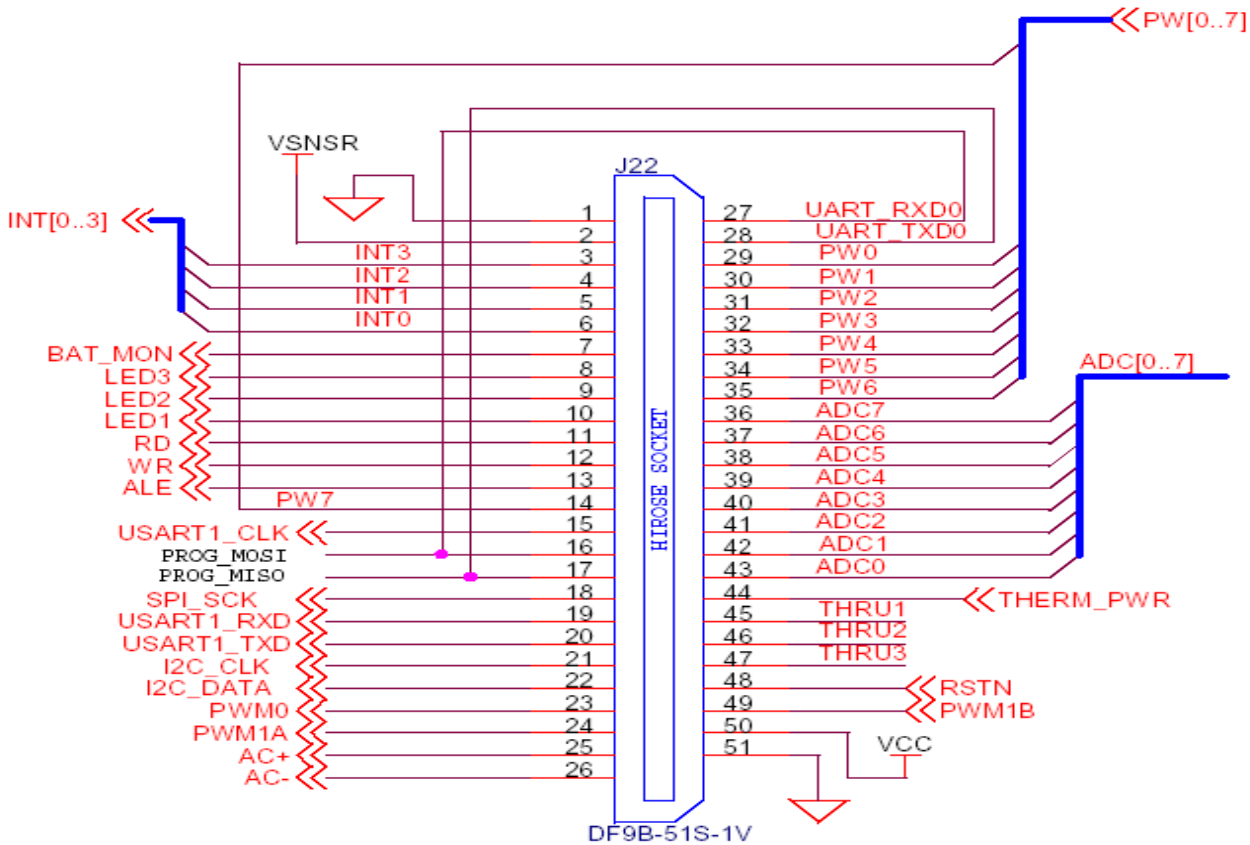

Mica2Dot Sensor Interface

PIN	DESCRIPTION
TP1	GND
TP2	ADC7
TP3	ADC6
TP4	ADC5
TP5	ADC4
TP6	VCC
TP7	PW1
TP8	PW0
TP9	UART_TXD
TP10	UART_RXD
TP11	RESETN
TP12	SPI_CK
TP13	ADC3
TP14	ADC2
TP15	PWM1B
TP18	GND
TP19	INT1
TP20	INT0
TP21	THERM_PWR

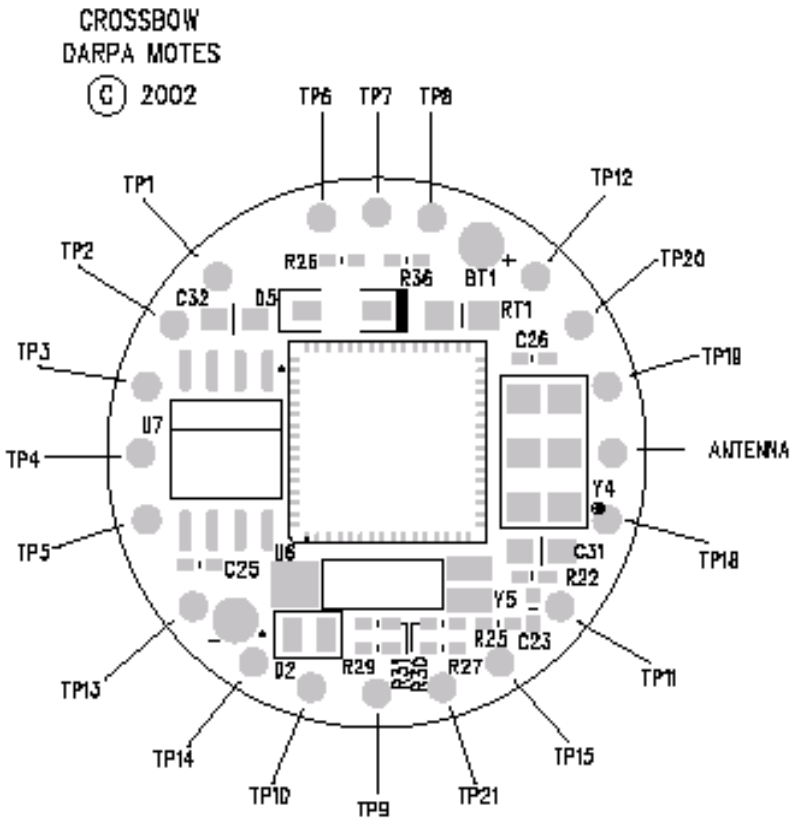

- 6 ADC Channels
- 6 I/O Channels

Battery Life Computation

- Two models:
  - 1% duty cycle
  - 0.5% duty cycle
- Conclusion:
  - To achieve multi-year battery life, must sleep most of the time.
- Spread Sheet in on CD

SYSTEM SPECIFICATIONS					
Currents			**Duty Cycles**		
	value	units	Model 1	Model 2	units
Micro Processor (Atmega128L)					
current (full operation)	6	ma	1	0.5	%
current sleep	8	ua	99	99.5	%
Radio (Chipconn 1000)					
current in receive	8	ma	0.75	0.4	%
current xmit	12	ma	0.25	0.1	%
current sleep	2	ua	99	99.5	%
Flash Serial Memory (AT45DB041)					
write	15	ma	0	0	%
read	4	ma	0	0	%
sleep	2	ua	100	100	%
Sensor Board					
current (full operation)	5	ma	1	0.5	%
current sleep	5	ua	99	99.5	%
Battery Specifcations					
Capacity Loss/Yr	3	%			

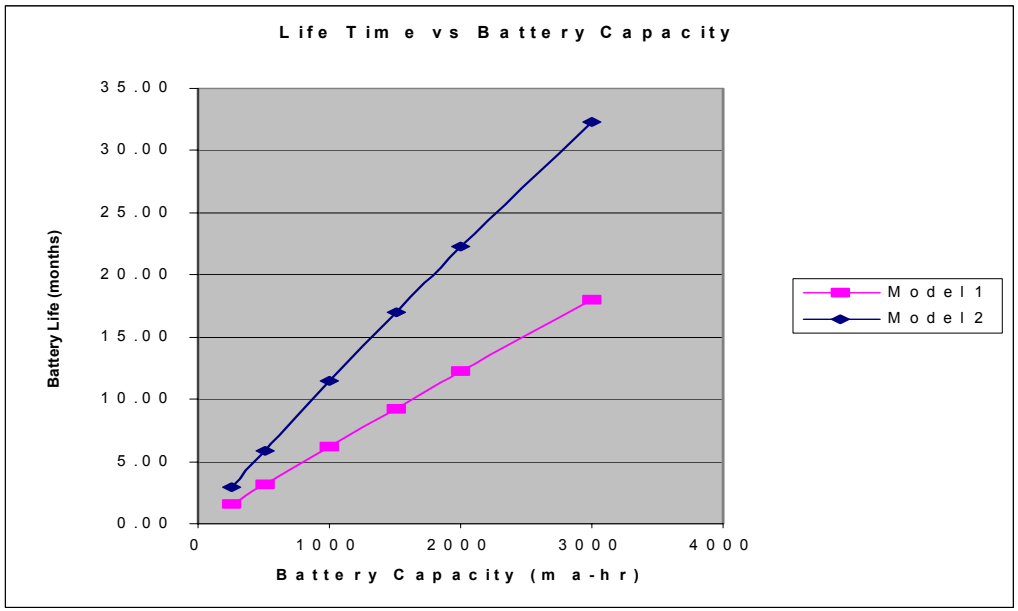

Crossbow TECHNOLOGY INC.

SMARTER SENSORS IN SILICON

MICAz (Coming Soon)

- Chipcon CC2420, 802.15.4, Zigbee Radio
- Same platform (Atmega128,flash…) as MICA2
- 2.4 Ghz (same as Wi-Fi and Bluetooth)
- Direct Spread Spectrum
- 250 kps throughput
- Range:
  - Indoors 60’ (~80% of 916 Mhz mica2)
  - Outdoors 150’ (~50% of 916Mhz mica2)
- Hardware MAC encryption
- 128 byte Rx/Tx fifo
- FCC certified

MICA3 (Coming Soon)

- Chipcon CC1020 Radio
- Same platform (Atmega128,flash…) as MICA2
- 433Mhz and 916 Mhz bands
- GFSK
- 76 kps throughput
- 27dbm output for extended range
- FCC certified

Next Generation Atmega (2004)

- 0.1 uA power down (10uA for ATmega128)
- 1.8 volt operation (2.4 for ATmega128)
- Atmega256: 256K flash, 8K ram

Crossbow Sensor Boards

Part #	Mote Support	Sensors
MTS101CA	MICA,MICA2	Light (photo resistor) Temperature (Thermistor) Prototyping area
MDA300CA	MICA2DOT	Protoyping
MTS300CA	MICA, MICA2	Light, Temperature, Acoustic, Sounder, 2-Axis Accelerometer (ADXL202), and 2-Axis Magnetometer
MTS500CA	Mica2Dot	Prototyping
MDA300CA	Mica2	On board humidity/temp. External sensors.
MTS400/420	Mica2	GPS weatherboard
MDA420	Mica2	High speed vibration

See **MTS/MDA Sensor and Data Acquisition Boards User's Manual**

MTS101CA

- Light photo resistor-Clairex CL94L
- Thermistor - YSI 44006,
- Both sensor are highly non-linear.
- Good prototyping area.

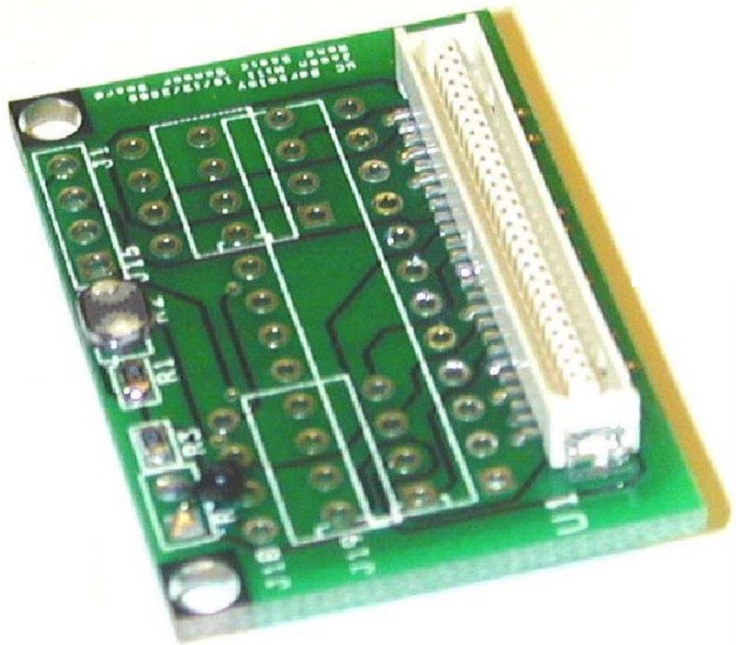

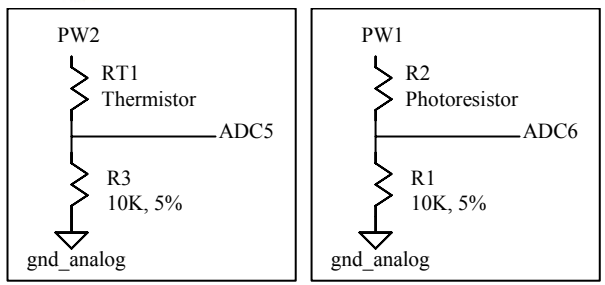

To use this sensor board add (modify) the apps/app/makefile for:

SENSORBOARD = basicsb

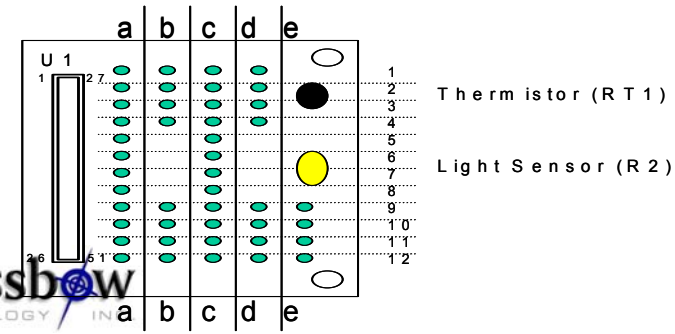

MDA500CA

- Prototyping board for mica2dots

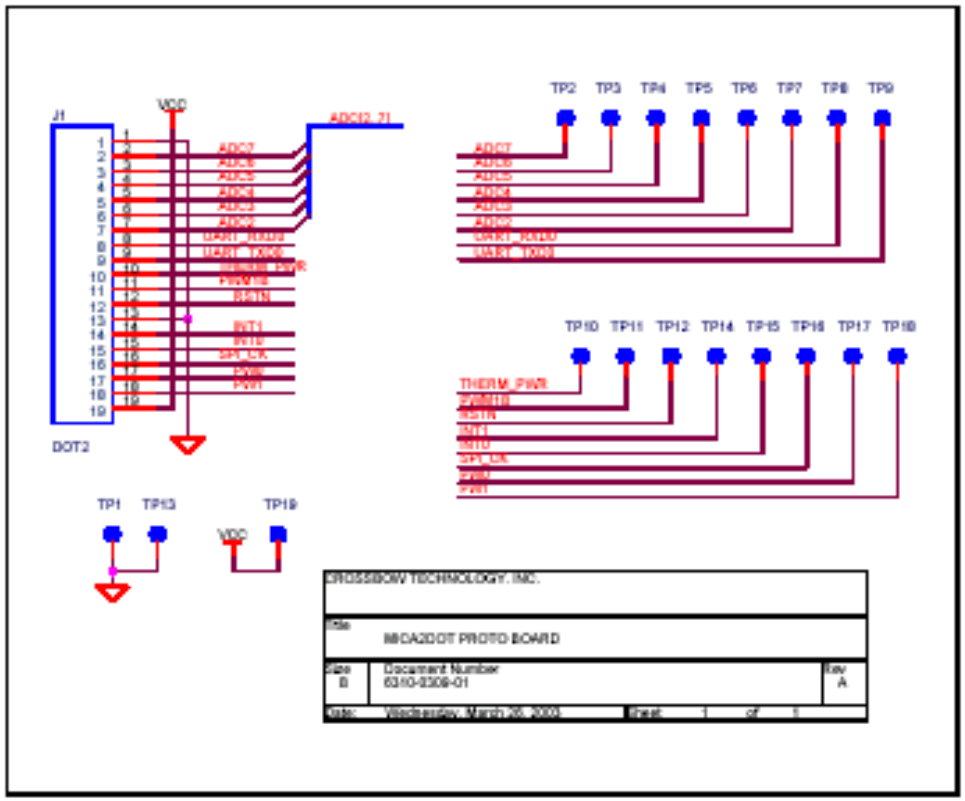

MTS300CA/MTS310CA

- Light (Photo)-Clairex CL94L
- Temperature-Panasonic ERT-J1VR103J
- Acceleration-ADI ADXL202
  - 2 axis
  - Resolution: ±2mg
- Magnetometer-Honeywell HMC1002
  - Resolution: 134µG
- Microphone
- Tone Detector
- Sounder
  - 4.5kHz

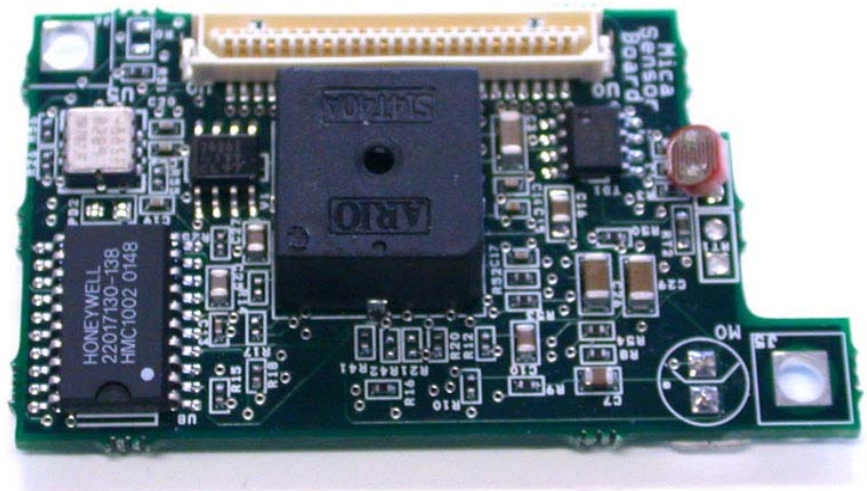

SENSORBOARD = micasb

MTS400/420 – GPS/Weather

- Gps (LeadTek 9546) - optional
  - SiRFstartII LP chipset (60ma)
  - External active antenna.
  - 12 channels
  - 15 Meter (SA off); 7 Meter (WAAS corrected)
  - DC Booster to maintain required voltage
- Temperature & Humidity (Sensirion SHT11).
  - All digital (14 bits)
  - 3.5% RH accuracy, 0.5degC Temperature accuracy

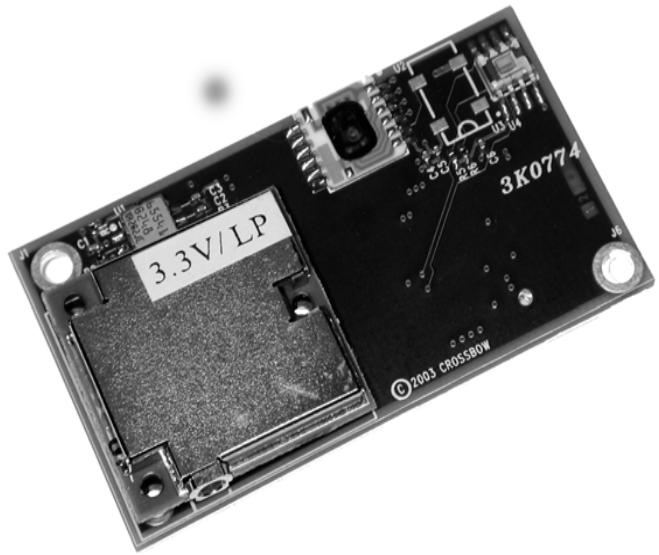

MTS400/420 – GPS/Weather

- Barometric Pressure and Temperature (Intersema MS5534A)
  - All digital
  - 300 to1100 mbar, 3% accuracy
  - -10 to +60 degC, 3% accuracy
- Ambient Light (TAOS TSL2250)
  - All digital
  - 400-1000nm response
- Acceleration-ADI ADXL202
  - –2 axis
  - –Resolution: ±2mg
- 2 K EEPROM for user configuration info.

MDA300

- *8* External Analog Inputs
  - External Sensors
  - Hi and low level signals
  - Block Screw Terminal
- *8* channel digital I/O
- *2* relays
- On board *12*-bit ADC
  - 0-2.5V, 0-3V, 0-5V Ranges
- Stable 2.5V Reference
- 3V and 5V power
- Designed by UCLA CENS w/ Crossbow and UCB

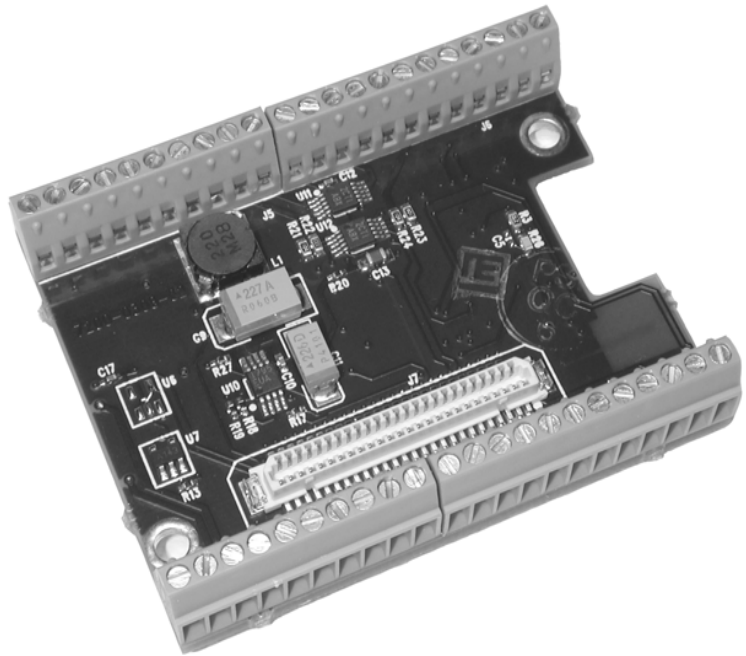

http://www.cens.ucla.edu/~mhr/daq/

MDA420

- *6* External Analog Inputs
  - External Sensors
  - 2V or 10V FS inputs
  - Block Screw Terminal
- RPM Mag Pick-Up Tachometer Signal
- 5V voltage excitation or 2mA Constant Current sensor excitation
- On board *16*-bit ADC
- 5-pole programmable anti-aliasing filter
- Up to 25 KiloSample/sec sampling
- 64K sample data storage
- On-board Atmega128 for data acquisition.

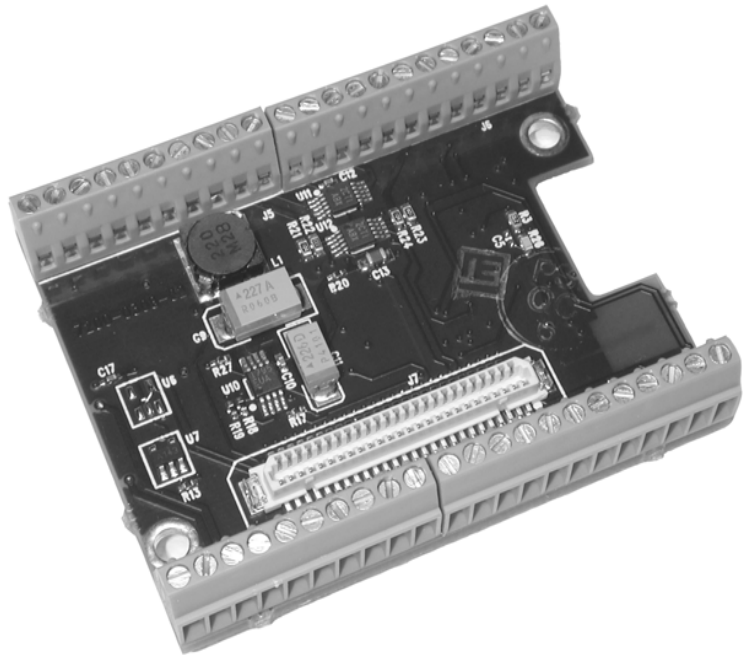

PNI- Magnetometer/Compass

- Resolution: 400 µGauss
- Very low power
- Three axis

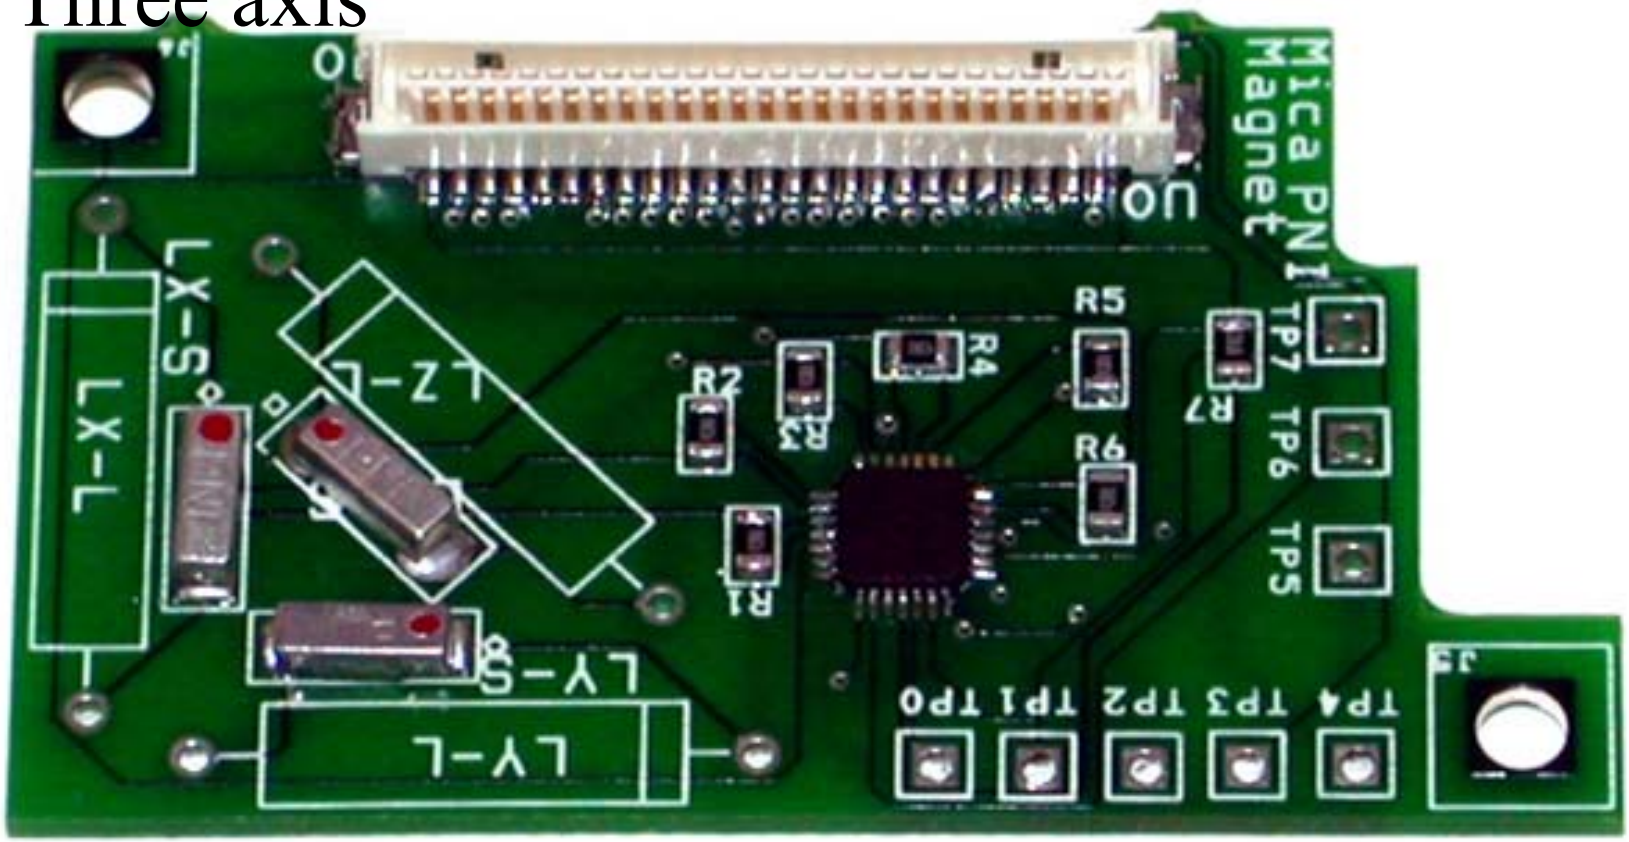

Ultrasonic Transceiver

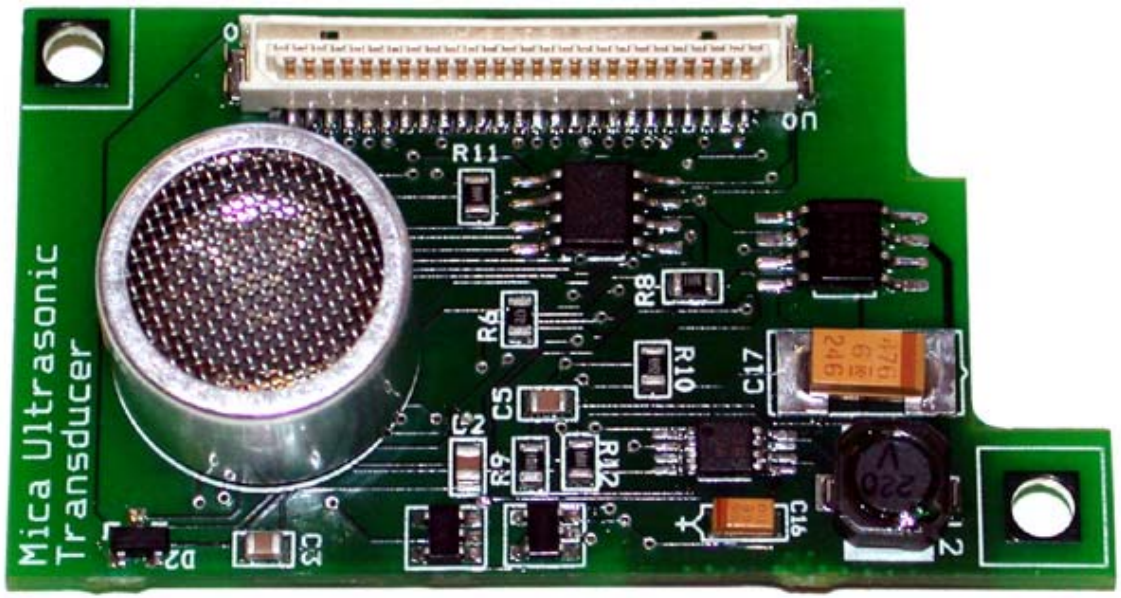

- Used for ranging
- Up to 2.5m range
- 6cm accuracy
- Dedicated microprocessor
- 25kHz element
- Mica2 and Mica2Dot versions

Mica2Dot Weather Board

- UCB environmentally packaged weatherboards for GDI
- Temperature & Humidity (Sensirion SHT11).
  - All digital (14 bits)
  - 3.5% RH accuracy, 0.5degC Temperature accuracy
- Barometric Pressure and Temperature (Intersema MS5534A)
  - All digital
  - 300 to1100 mbar, 3% accuracy
  - -10 to +60 degC, 3% accuracy
- Ambient Light (TAOS TSL2250)
  - All digital
  - 400-1000nm response
  - Photosensitive Light Sensor..

Mote In Tires

- Real time control of vehicle dynamics.
- 3 bridge accelerometers (500g-1000g) mounted in tire.
- Sensor board has 3 channels of amplifiers, filters, programmable D/As for bridge balancing.
- Monitor and analyzed acceleration forces when tire is in contact with ground.
- Transmit results every revolution.
- 3 motes, 1 master, 2 slaves.

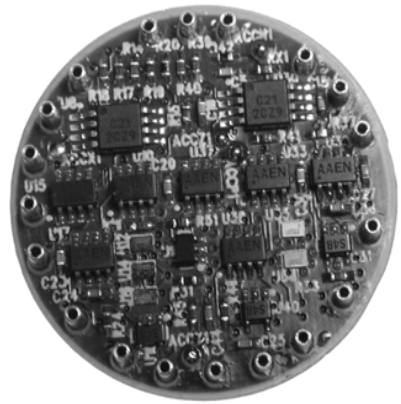

Micro Radar

•Darpa project: Detect intruders with micro-powered radar detectors and relay data through mote network.

•Drop detectors from UAV (ex: Predator)

•Ghz Doppler radar detector.

• Done with LLL and Advantaca

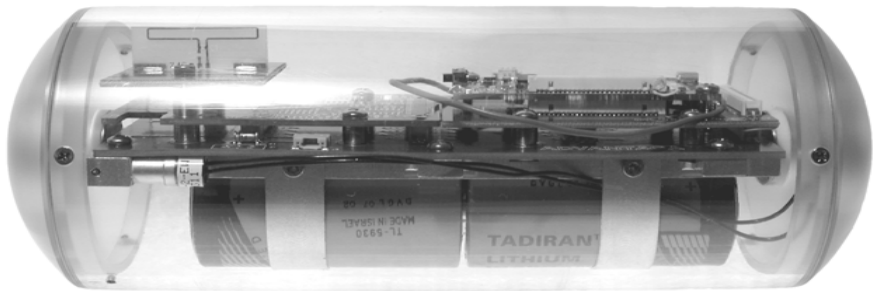

COTS-BOTS (UCB)

- 5” x 2.5” x 3” size
- <$250 total
- 2-axis accelerometer

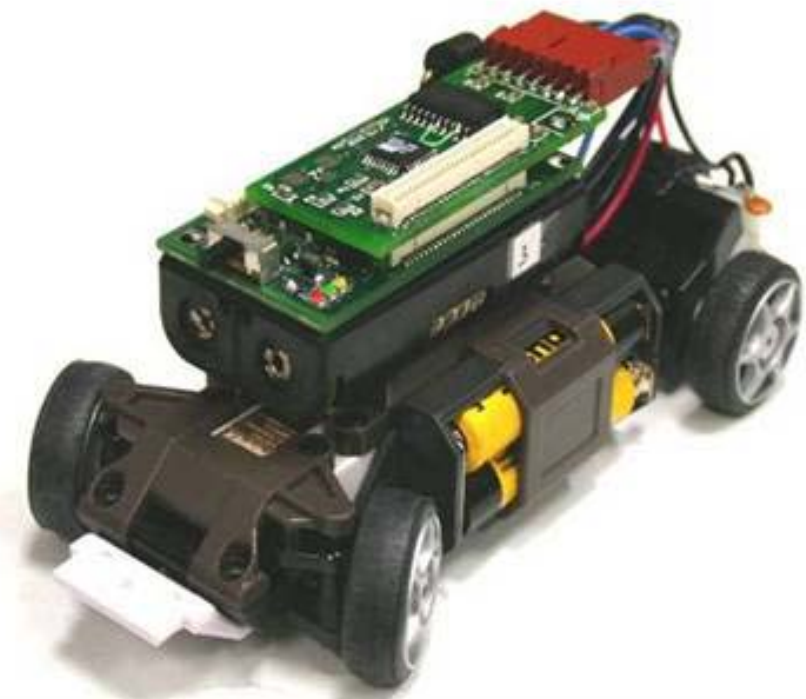

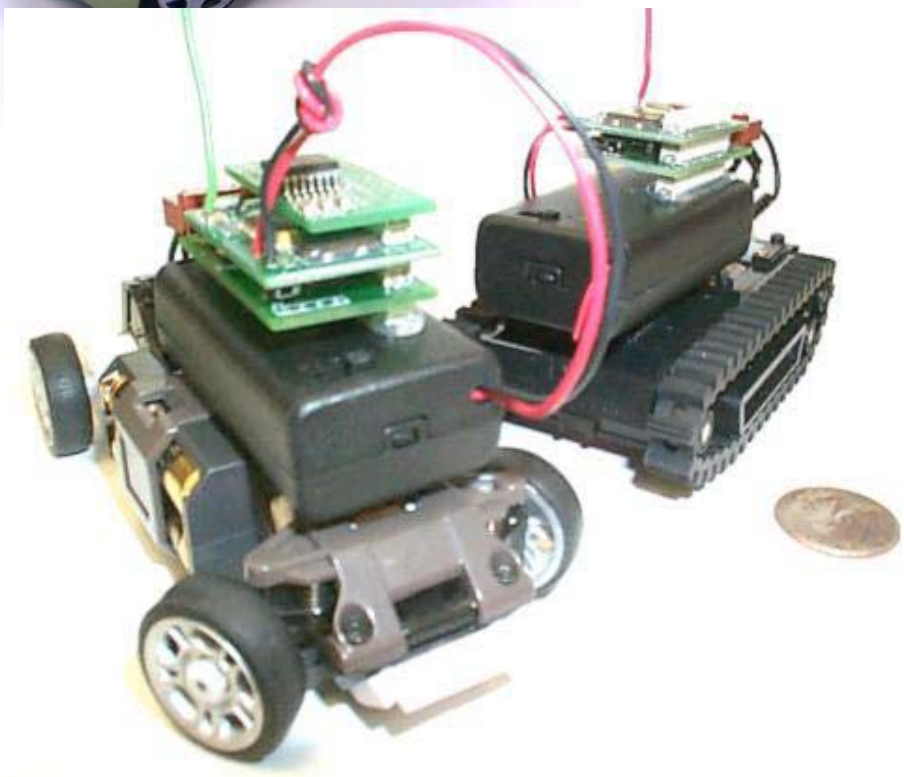

MICAbot (Notre Dame)

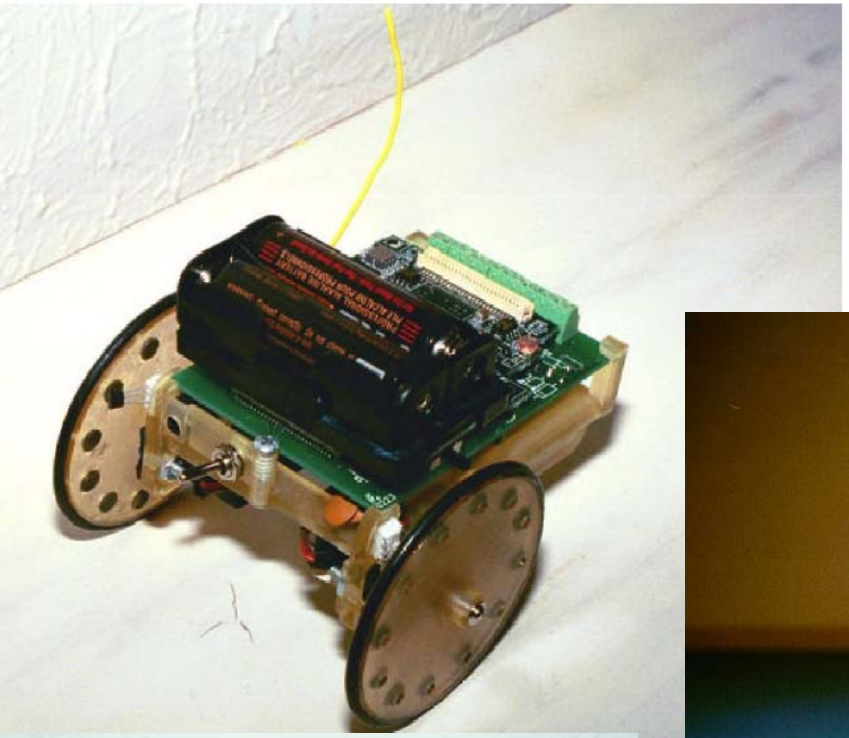

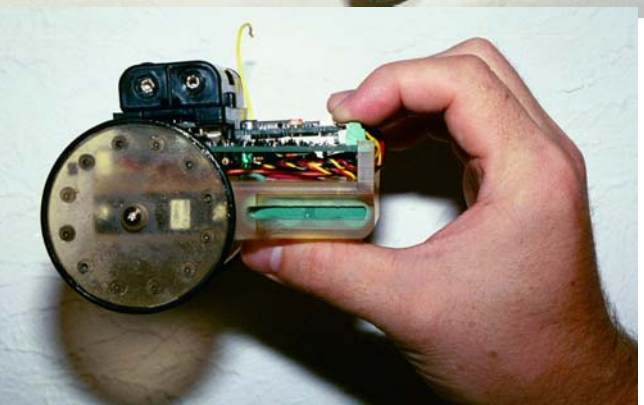

- Designed for large-scale research in distributed robotics and ad-hoc wireless networking.
- $300 each

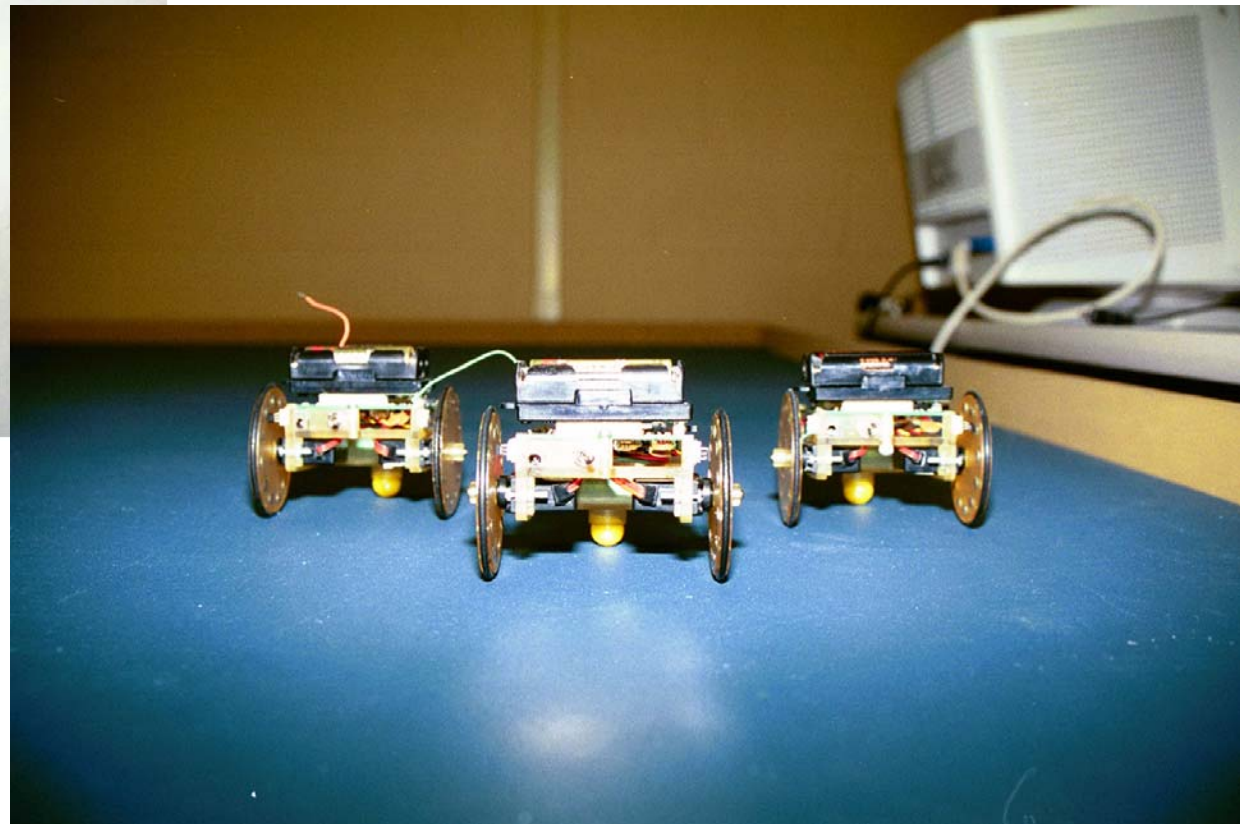

Building Apps with Different Sensor Boards

Select different sensor boards by editing the /apps/../makefile:

SENSORBOARD=micawbdot

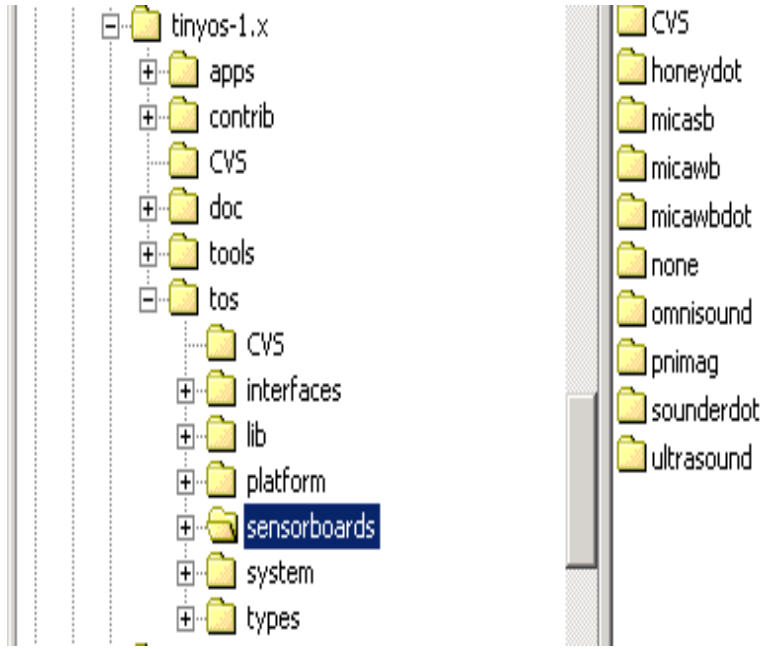

Ratiometric Adcs & Sensors

- Atmega128 is 10 bit (1024) ratio metric ADC
- If sensor is ratio metric then don't have to measure battery voltage. (Sensor's FS changes with battery voltage).
- Ratio metric sensors may not work over full range of battery voltage, be careful.
- ADC full scale is proportional to battery voltage.
- Must measure battery voltage to get accurate sensor readings:

  Battery Volts = RefVolt*ADC_FS/data

- Mica2 and Mica2Dot have on-board voltage references to calibrate the ADC full scale.

  /contrib/xbow/apps/XSensorMica2

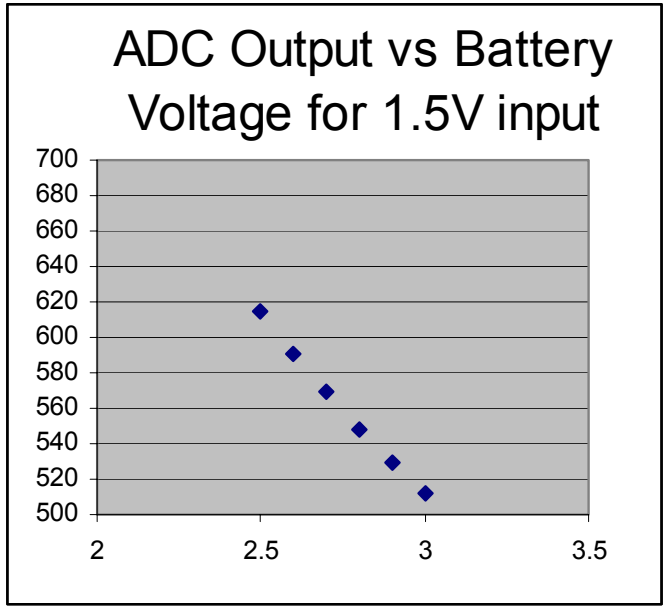

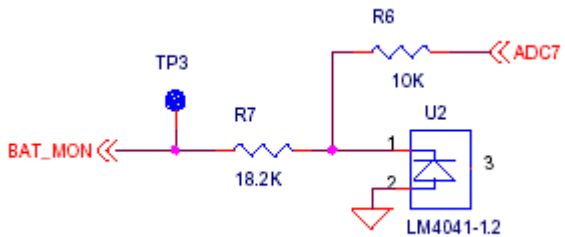

Other Adcs & Sensors

- MTS420 (gps wb) and mica2dot weatherboards use sensors with built in ADCs.
- This improves accuracy but at a higher sensor cost (3x-5x cost increase)
- MDA300 uses on-board precision 12 bit ADC with a good voltage reference. Shared with all 8 input channels. Good, cost effective solution

Enclosures for Environmental Monitoring

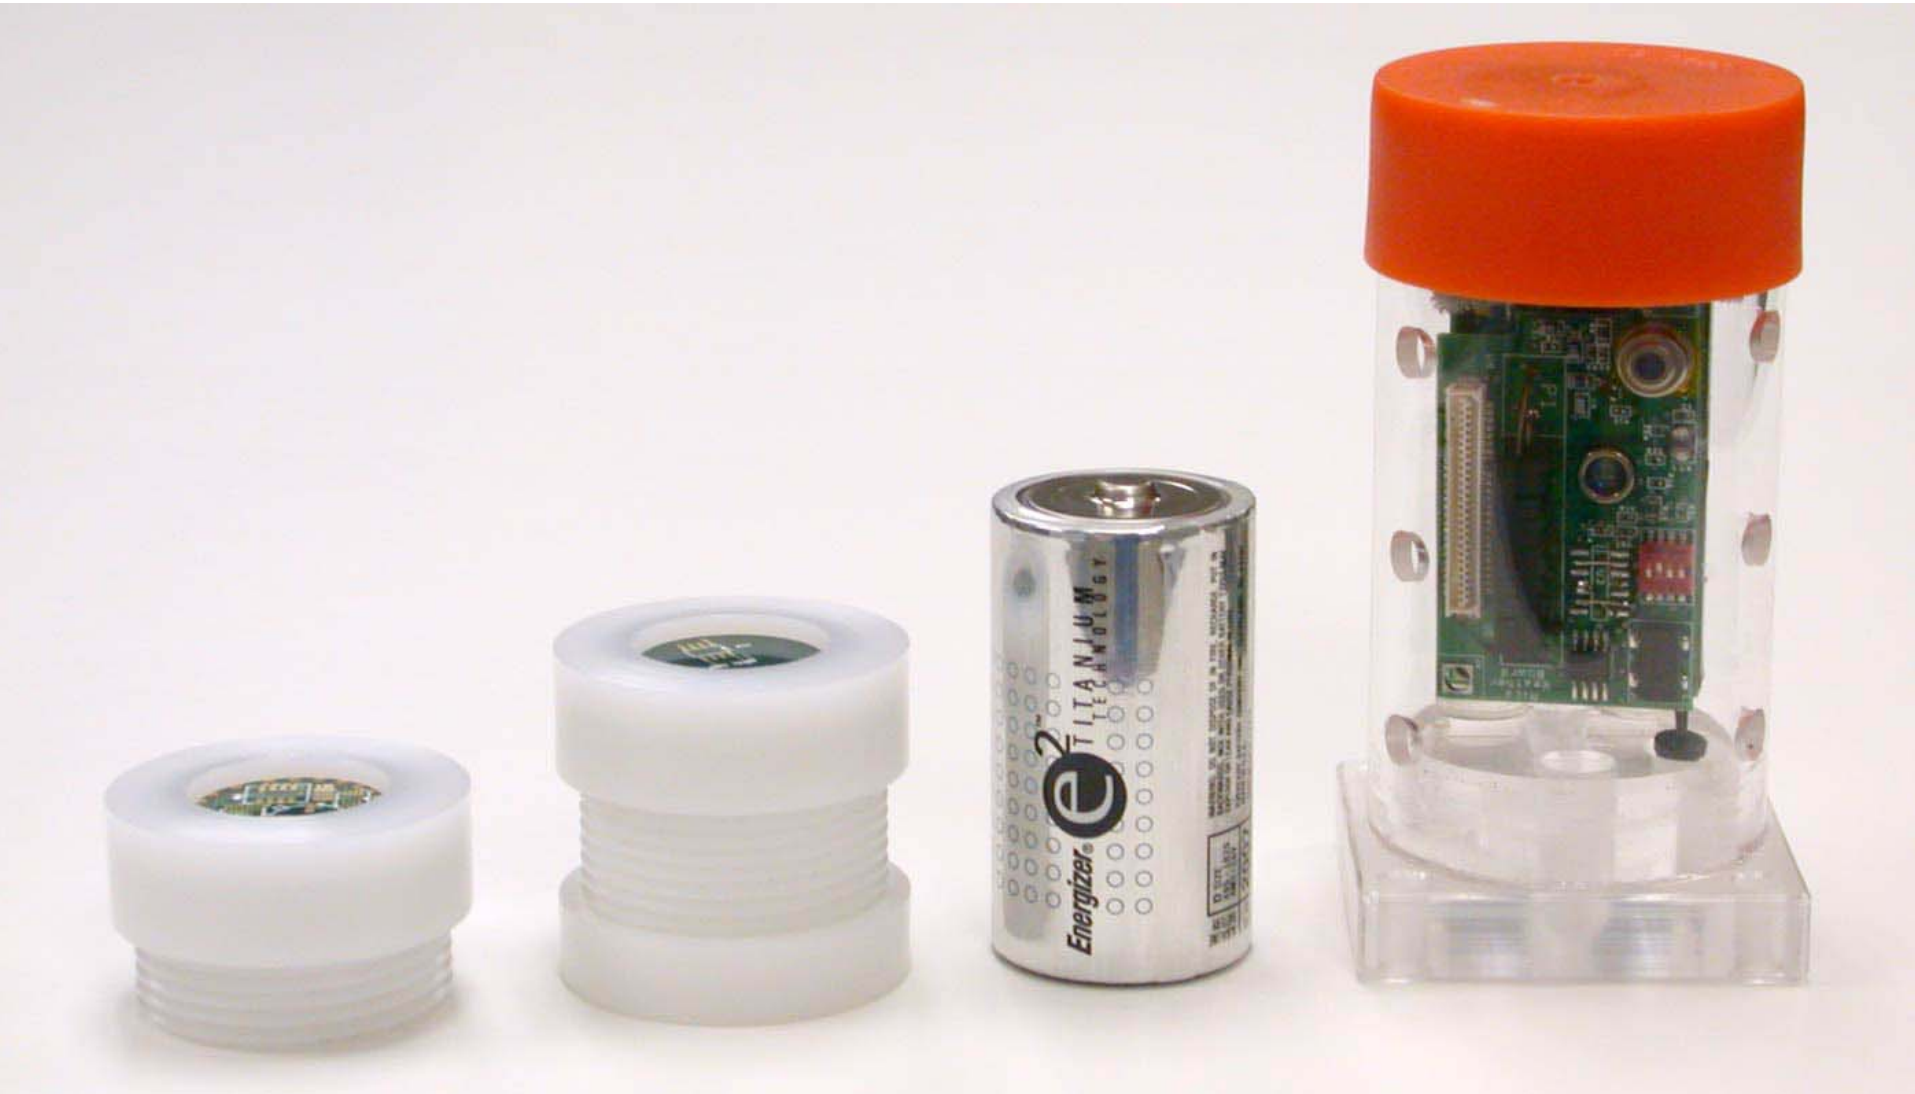

Mica2Dot Enclosures

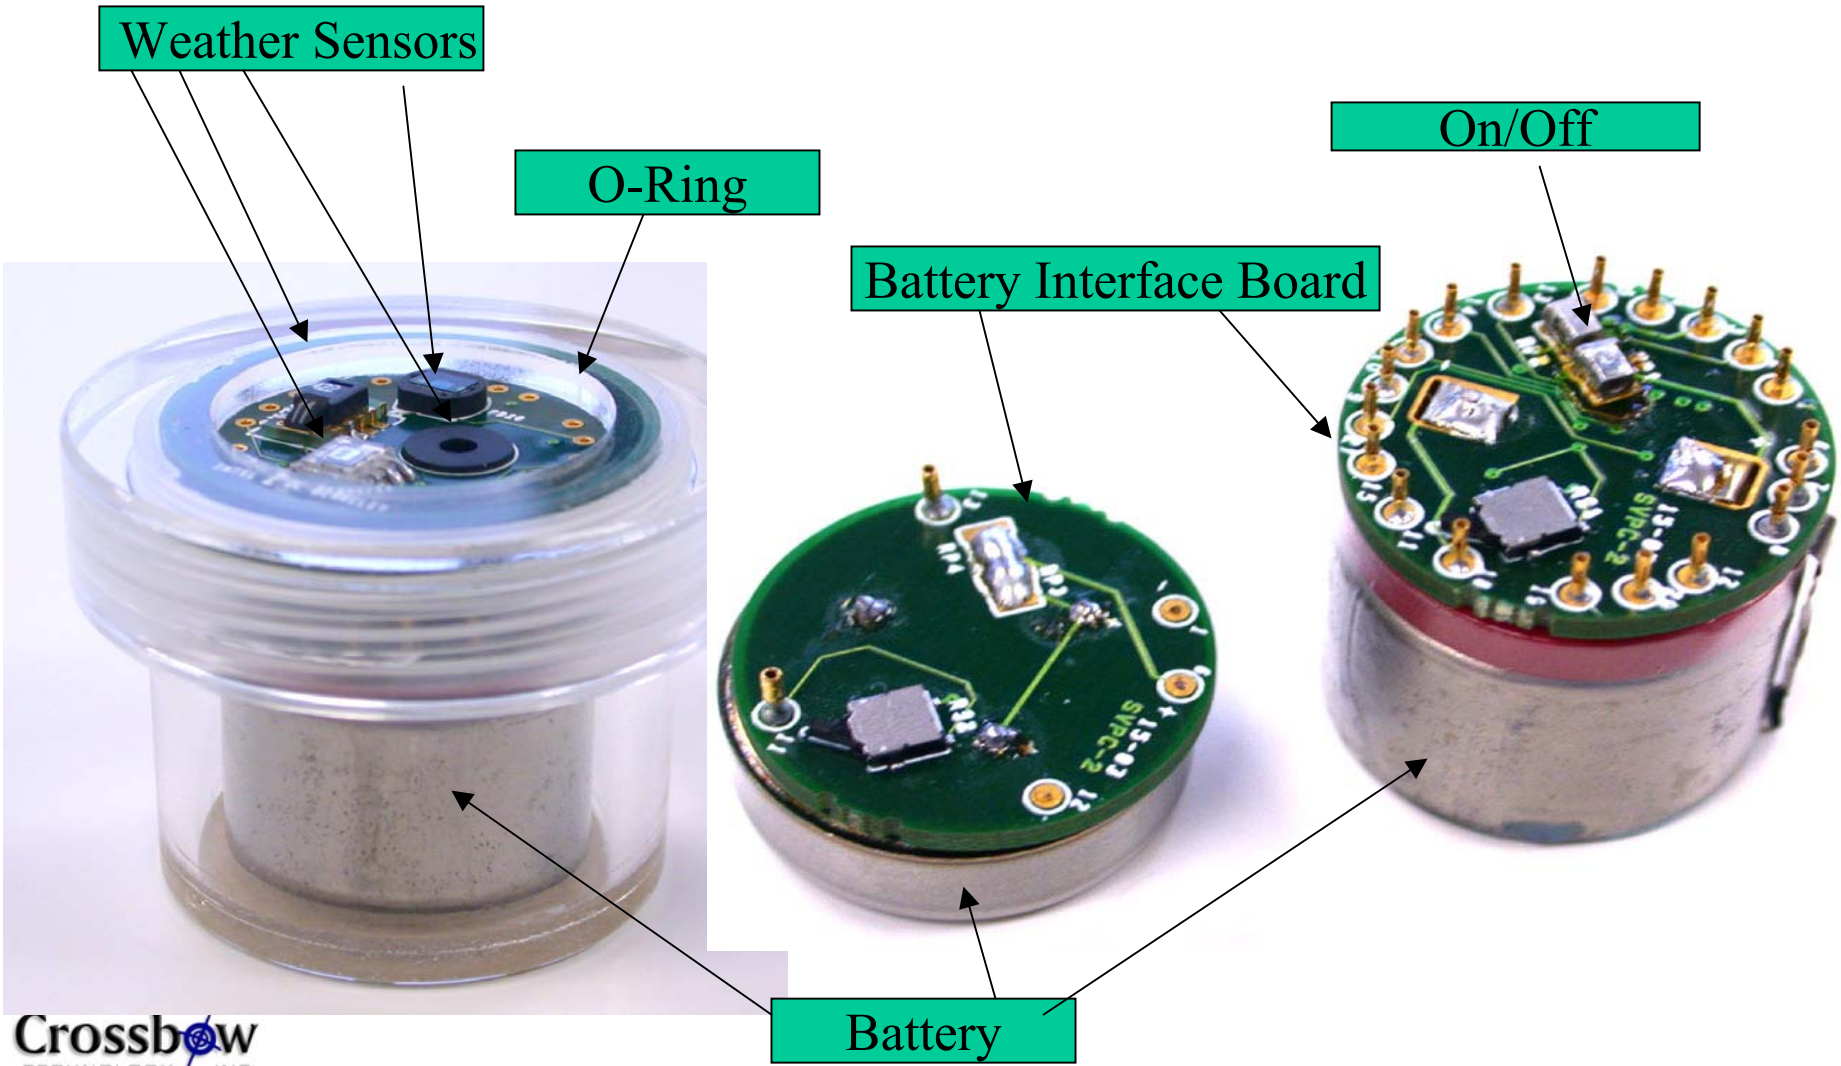

Sensor Power Management

- Simple Strategy for Low Power Sensors:
  - Use Atmega output pins to source sensor power.
  - Will source ~5-10ma of current per pin.
- Analog Switch Strategy
  - Use hardware I2C (mica2) or software I2C (mica2dot) (in Sourceforge)
  - Switch connects sensor power to VCC.
  - ADG714 switch has 2.5 ohm on resistance
- DC-DC Booster Strategy
  - Create battery independent, constant supply voltage.
  - Create +5 V or more
  - Turn on booster from analog switch or Atmega
  - Boosters are ~80%-90% efficient. Need good layout and decoupling. Not ratiometric



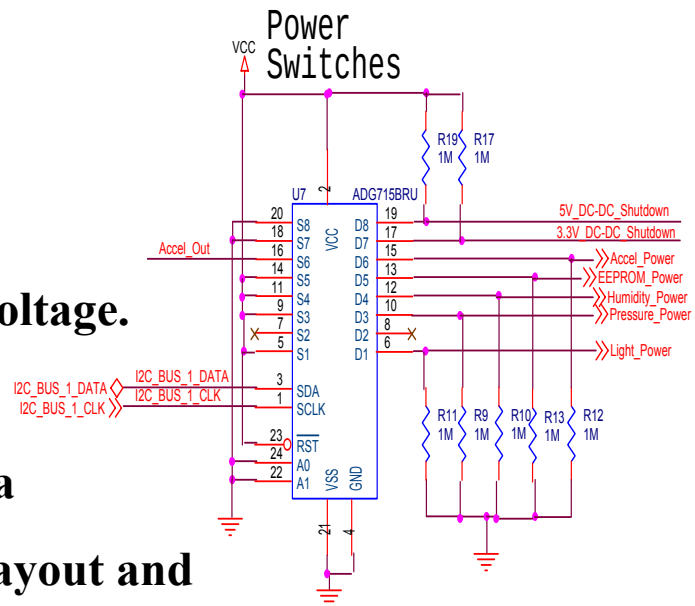

Mote Programming and Base Station Boards

Overview:

- MIB500/MIB300 Parallel Port Programmer
- MIB510 Serial Port Programmer
- MIB600 LAN Programmer

MIB500/MIB300 (OBSOLETE)

- Programs mote through the PC's parallel port
- Supports Mica, Mica2, Mica2Dot
- Voltage monitor to protect from low battery voltage. Low battery voltage can cause fuse errors.
- Serial port for base station operation
- Parallel port can cause flash corruption on some computers due to uisp parallel port drivers. THESE MAY BE IRRECOVERABLE
- Crossbow application note at www.xbow.com to help fix uisp problems.
- JTAG connector: AVRStudio and JTAG pod allows viewing and setting all fuses.

MIB510

•Programming through the serial port. On board ISP uP is 3x faster than parallel port.

•Shares serial port with mote for base station operation.

•Voltage monitor to protect from low battery voltage

• Suports Mica (Atmega128 uP only), Mica2, Mica2Dot

• JTAG port powered directly.

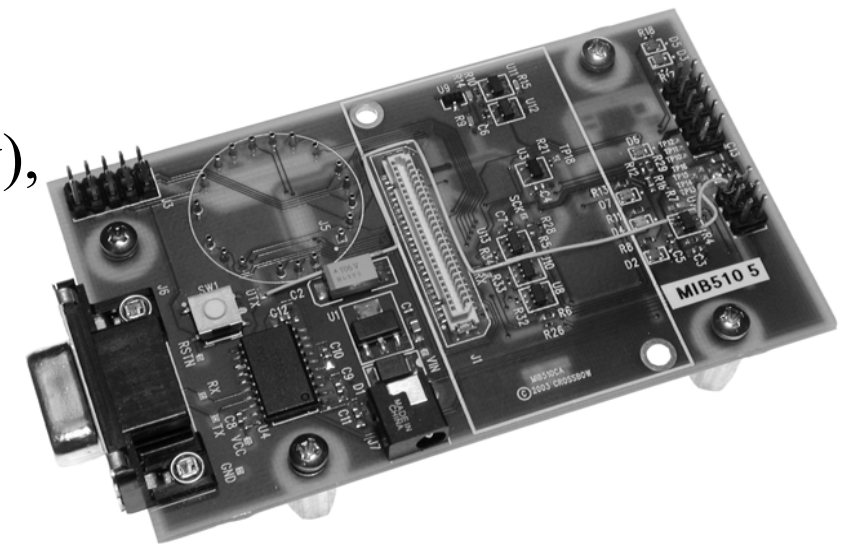

MIB600

- Ethernet connection as serial forwarder.
- Programming through ethernet.
- Remote base station operation through ethernet.
- Remote powered ethernet sensor.
- Remote code debugging through ethernet. Ideal for mote network debug.
- Similar configuration (eprb) used extensively at UCB for mote development.
- Supported in uisp